

Specifications

SMART Board® 7086 Pro interactive display with iQ

Model SBID-7286P

Overview

The SMART Board® 7086 Pro interactive display with iQ is the hub of your meeting room. PC-free embedded computing provides one-touch access to collaborative tools, including a whiteboard, wireless screen sharing and a web browser. With minimal network integration, there's no need for wires, cables or manual software and firmware updates.

The 86" 4K ultra-high-definition LED display provides optimal image clarity and wide viewing angles. With the Pen ID™ feature, you can assign different appearances to the four pens and write or draw over any application in digital ink.


Object Awareness™ allows you to perform mouse functions with your finger, write in digital ink with the pen, and erase with your palm or eraser—all without switching tools or modes. You can use a variety of gestures in applications, and four users can write or draw at the same time.

See smartechnology.com for more information.



Dimensions and weights¹

Dimensions

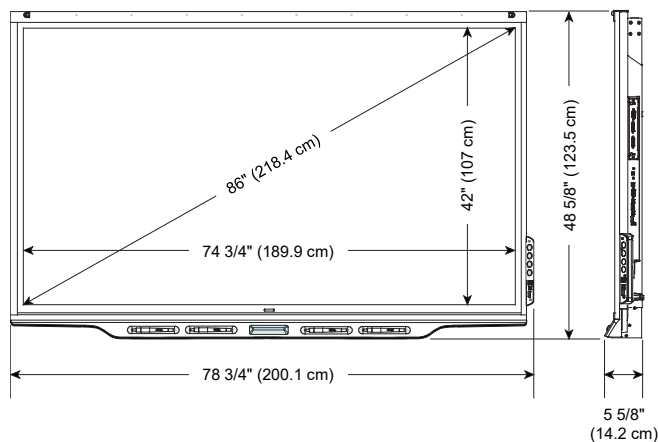

Weight

205 lb. (91 kg)

Shipping dimensions (including pallet)

86 1/2" × 60" × 14"
(220 cm × 163 cm × 35.5 cm)

Shipping weight

258 lb. (117 kg)



As an ENERGY STAR® certified signage display, the SMART Board 7086 Pro interactive display meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Interaction

Touch technology	HyPr Touch™ (Hybrid Precision Touch) proprietary hybrid system, which greatly improves upon its InGlass™ core by optimizing both touch and pen performance, resulting in virtually no lag and zero contact detect height
Multitouch capabilities	Up to 16 simultaneous interaction points (combination of 10 finger touch points, four pen touch points and two eraser touch points) ²
Object Awareness	Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger, eraser, or palm.
Pen ID	Four people can write independently and simultaneously, using different colored ink.

Display

Type	LED
Aspect ratio	16:9
Optimal resolution ("HDMI 1" input)	4K UHD (3840 × 2160) at 60 Hz
Horizontal frequency (typical)	135 kHz
Vertical frequency (typical)	60 Hz
Contrast ratio (typical)	5000:1
Brightness (maximum)	360 cd/m ²
Pixel dimensions	0.429 mm × 0.429 mm
Gamut	72% of NTSC
Viewing angle	178°
Response time (typical)	8 ms

100BASE-T Ethernet Two external ports for a four-port Fast Ethernet switched network connecting the interactive display and the iQ appliance to an external network and an external device, such as a computer

Presence detection Dual sensors that reduce startup time and power consumption during inactivity

Audio 10 W integrated speakers (×2)

Noise level <30 dBA

²Only up to 10 touch points and no pen or eraser support on Chrome OS™ operating system

Included cables and accessories	iQ appliance Country-specific power cable USB cable Pen (x4) Eraser
iQ appliance	
Wi-Fi	IEEE 802.11A/B/G/N/Ac with 2 × 2 MIMO (both 2.4 and 5 GHz bands)
Bluetooth®	Bluetooth 4.2 dual mode (backwards compatible with Bluetooth 2.1 + EDR)
Capture options	Establish a Bluetooth wireless connection with a supported mobile device (see below) by scanning the interactive display's unique QR code
Supported languages	Danish Dutch English Finnish French German Italian Korean Norwegian Portuguese Russian Simplified Chinese Spanish Swedish Traditional Chinese Ukrainian Vietnamese
Mounting holes	For a standard VESA 600 mm × 400 mm mounting plate Lower mounting holes 17 1/8" (43.4 cm) from the bottom of the interactive display
Mounting bracket depth	Minimum depth of 2" (5.1 cm) for all components on the back of the interactive display for airflow

Connectors

Connector panel	OPS slot (for the iQ appliance) Stereo 3.5 mm out S/PDIF out “VGA” input connectors Video: VGA in (1080p) Audio: Stereo 3.5 mm in Touch: USB Type-B “HDMI 1” input connectors Video/audio: HDMI 2.0 in (4K UHD at 60 Hz) Touch: USB Type-B “Display Port” input connectors Video/audio: in (4K UHD at 30 Hz) Touch: USB Type-B USB Type-A ³ RJ45 (×2)
Convenience panel	“HDMI 2” input connectors Video/audio: HDMI 1.4 in (4K UHD at 30 Hz) Touch: USB Type-B USB Type-A (×2)
Bottom	AC power in AC power out RS-232 in RS-232 out
HDCP support	Version 1.4/2.2

Installation requirements

Interactive display See the *SMART Board 7000 and 7000 Pro series interactive displays installation and*

IMPORTANT

The display needs an internet connection for downloading and installing important updates. Ask the network administrator to confirm that the network has been correctly configured for the iQ experience. For more information about network configuration.

SMART kapp® app

Apple devices	iOS 9 or later operating system software 50 MB of storage iPhone 4S or later Third-generation iPad or later First-generation iPad mini or later Fifth-generation iPod touch or later
---------------	---

³For service use only

Android™ devices	Android 4.4.4 (KitKat) or later operating system 50 MB of storage (internal or SD card) 1024 MB of RAM 720p or better screen resolution Bluetooth 2.1 + EDR 3 megapixel or better rear-facing camera (recommended)
SMART kapp viewer	
Mobile	Safari for iOS 9 or later operating system software Chrome™ for Android 39.0.2171.93 or later
Desktop	Internet Explorer® 10 or later Chrome 39.0.2171.95 or later Firefox® 34.0.5 or later Safari 8.0 or later
Room computers and guest laptops	
General requirements	
4K UHD	Video card that can support 3840 × 2160 resolution at 60 Hz and that has 1 GB DDR 5 memory
Mini-computers	
General requirements	
Dimensions	Smaller than 10" × 10" × 2" (25.4 cm × 25.4 cm × 5.1 cm)
Weight	Less than 10 lb. (4.5 kg)
Mounting	VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern
Cable requirements	
HDMI	Maximum length: 23' (7 m)
NOTES	
<ul style="list-style-type: none"> • Use only certified HDMI cables that have been tested to support the performance standard you require. • The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality. 	
Display Port	Display Port 1.2 compliant or better Maximum length: 23' (7 m)
USB 2.0	USB 2.0 certified Hi-Speed (480 Mbps) support Maximum length: 16' (5 m)
Important	Using cables that exceed these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to <i>Installation best practices for SMART products</i> for comprehensive information about cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements 100V to 240V AC, 50 Hz to 60 Hz

Interactive display and iQ appliance power consumption at 77°F (25°C)

Standby mode <8 W

Normal operating 165 W

Standalone interactive display power consumption at 77°F (25°C)

Standby mode <2 W

Normal operating 159 W

Operating temperature 41–95°F (5–35°C)

Storage temperature -4–140°F (-20–60°C)

Humidity 5–80% relative humidity, non-condensing

Certification and compliance

Regulatory certification EU RED and LV Directives, ISED, cUL, FCC, UL, RCM, CITIC, TRA

Environmental compliance

European Union REACH, RoHS, WEEE, Battery and Packaging

U.S. CONEG Packaging, California Prop 65

Purchasing information

Order number

SBID-7286P Black-framed SMART Board 7086 Pro interactive display with iQ, one SMART Meeting Pro software room license and 10 SMART Meeting Pro software personal licenses

SBID-7286P-W White-framed SMART Board 7086 Pro interactive display with iQ, one SMART Meeting Pro software room license and 10 SMART Meeting Pro software personal licenses

Optional accessories

Warranty Three-year limited equipment warranty

Extended warranty

EWY1-SBID-7286P One-year warranty extension

EWY2-SBID-7286P Two-year warranty extension

INTEGRATE AV

Audio Visual Design, Integration & Implementation

1800 742 748

INTEGRATE AV

Level 4

384 Eastern Valley Way

Roseville, NSW 2069

t. 1800 742 748

e. info@integrateav.com.au

www.integrateav.com.au