

Specifications

**SMART Board® 6065-V2 interactive flat panel with iQ**

Model SPNL-6265-V2

Overview

The SMART Board® 6065-V2 interactive flat panel with iQ is the hub of your classroom. iQ technology connects devices, lesson content and pedagogically relevant software to create a cohesive educational experience. PC-free embedded computing provides one-touch access to a diverse suite of SMART applications—Notebook lessons, amp workspaces, lab gamification activities and whiteboard—and collaborative tools, such as wireless screen sharing and a web browser. There’s no need for wires, cables or manual software and firmware updates.




The 65" 4K ultra-high-definition LED display provides optimal image clarity and wide viewing angles. With the Pen ID™ feature, you can assign different appearances to the two pens and write or draw over any application in digital ink.

Object Awareness™ allows you to perform mouse functions with your finger, write in digital ink with the pen, and erase with your palm or eraser—all without switching tools or modes. You can use a variety of gestures in applications, and two users can write or draw at the same time.

See [integrateav.com.au](http://integrateav.com.au) for more information about this product.

Dimensions and weights<sup>1</sup>

Dimensions

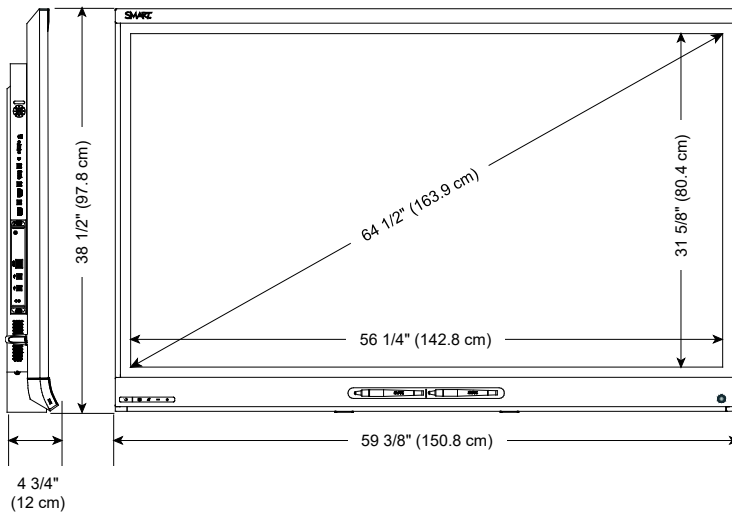

Weight

134 lb. (60.9 kg)

Shipping dimensions (including pallet)

69 1/4" × 49 5/8" × 11 7/8"

(175.8 cm × 126.1 cm × 30.3 cm)

Shipping weight

181 lb. (82.1 kg)



As an ENERGY STAR® certified signage display, the SMART Board 6065-V2 interactive flat panel with iQ meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

<sup>1</sup>All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

## Hardware

### Interaction

Touch technology	DViT® (Digital Vision Touch) technology
Multitouch capabilities	8 touches <sup>2</sup>
Object Awareness	Behavior adjusts automatically to the tool or object being used, whether it's a pen, finger, eraser or palm.
Pen ID	Two people can write independently and simultaneously, using different colored ink.

### Display

Type	LED
Aspect ratio	16:9
Optimal resolution	3840 × 2160 at 30 Hz (HDMI®) or 60 Hz (DisplayPort)
Horizontal frequency	26.97–75.0 kHz
Vertical frequency	23.9–60.32 Hz
Contrast ratio (typical)	1200:1
Brightness (maximum)	338 cd/m <sup>2</sup>
Pixel pitch	0.372 mm × 0.372 mm
Gamut	68% of NTSC
Viewing angle	178°
Response time (typical)	8 ms

<b>Presence detection</b>	Presence detection sensor on the bottom frame
---------------------------	---

<b>Audio</b>	10 W integrated side-firing speakers (×2)
--------------	---

<b>Noise level</b>	<35 dBA
--------------------	---------

<b>Included cables and accessories</b>	iQ appliance 8' (2.4 m) country-specific power cable 16' 5" (5 m) USB cable Pen (×2)
--	---

<b>iQ appliance</b>	
Wireless technology	Bluetooth® 4.0 dual mode (backwards compatible with Bluetooth 2.1 + EDR)

Capture options	Establish a Bluetooth wireless connection with a supported mobile device (see below) by scanning the interactive flat panel's unique QR code
-----------------	--

<b>Mounting holes</b>	For a standard VESA® 300 mm × 400 mm mounting plate Lower mounting holes 13 3/4" (35 cm) from the bottom of the interactive flat panel
-----------------------	---

<sup>2</sup>Requires SMART Product Drivers to be installed. Some applications might not support 8 touches.

**Mounting bracket depth** Minimum depth of 1 5/8" (4.2 cm) for all components on the back of the interactive flat panel to clear the wall

## Connectors

<b>Side</b>	Connector panel: OPS slot (for the iQ appliance) USB 2.0 Type B (×3) HDMI 1.4 in (×2) DisplayPort in Stereo 3.5 mm out RS-232 in	iQ appliance: USB 3.0 Type-A (×2) USB 2.0 Type-B <sup>3</sup> USB 2.0 Type-B HDMI 1.4 in HDCP encrypted HDMI 1.4 out RJ45
<b>Bottom</b>	USB 2.0 Type-A	
<b>Back</b>	AC power inlet	

## Installation requirements

**Interactive flat panel** See the *SMART Board 6000 series interactive flat panels administrator's guide*

### SMART kapp® app

Apple devices  
iOS 8.1 or later operating system software  
50 MB of storage  
iPhone 4S or later  
Third generation iPad or later  
First generation iPad mini or later  
Fifth generation iPod touch or later

Android™ devices  
Android 4.4.4 (KitKat) or later operating system  
50 MB of storage (internal or SD card)  
1024 MB of RAM  
720p or better screen resolution  
Bluetooth 2.1+ EDR  
3 megapixel or better rear-facing camera (recommended)

### SMART kapp viewer

Mobile  
Safari for iOS 8.1 or later operating system software  
Chrome™ for Android 39.0.2171.93 or later

Desktop  
Internet Explorer® 10 or later  
Chrome 39.0.2171.95 or later  
Firefox® 34.0.5 or later  
Safari 8.0 or later

<sup>3</sup>For service use only

**Room computers and guest laptops**

## General requirements

4K UHD	Graphics card that can support 3840 × 2160 resolution at 30 Hz and that has 1 GB DDR 5 memory
--------	---

**Mini-computers**

## General requirements

Dimensions	Smaller than 10" × 10" × 2" (25.4 cm × 25.4 cm × 5.1 cm)
------------	--

Weight	Less than 10 lb. (4.5 kg)
--------	---------------------------

Mounting	VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern
----------	--

**Cable requirements****HDMI**

HDMI 1.4 compliant or better

Maximum length: 23' (7 m)

 **NOTES**

- Use only certified HDMI cables that have been tested to support the performance standard you require.
- The performance of cables longer than 23' (7 m) is highly dependent on the quality of the cable.

**DisplayPort**

DisplayPort 1.2 compliant or better

Maximum length: 23' (7 m)

**USB**

Maximum length: 16' (5 m)

**Important**

Using cables that exceed these maximum lengths may produce unexpected results, degraded picture quality or USB connectivity. Refer to the *SMART installation standards*.

**Storage and operating requirements**

<b>Power requirements</b>	100V to 240V AC, 50 Hz to 60 Hz
---------------------------	---------------------------------

**Interactive flat panel and iQ appliance power consumption at 77°F (25°C)**

Standby mode	15 W
--------------	------

Normal operating	113 W
------------------	-------

Maximum operating	189 W
-------------------	-------

**Standalone interactive flat panel power consumption at 77°F (25°C)**

Standby mode	<2.2 W
--------------	--------

Normal operating (out-of-box)	110 W
<b>Operating temperature</b>	41–95°F (5–35°C)
<b>Storage temperature</b>	-4–140°F (-20–60°C)
<b>Humidity</b>	5–80% relative humidity, non-condensing

## Certification and compliance

**Regulatory certification** UL (U.S./Canada), FCC, IC, CE, CCC, EAC, RCM, KC, SPRING, PSE

### Environmental compliance

European Union REACH, RoHS, WEEE and Packaging

U.S. Packaging and Conflict Minerals

## Purchasing information

### Order number

SPNL-6265-V2 SMART Board 6065-V2 interactive flat panel with IQ and SMART Learning Suite

### Optional accessories

WM-SBID-501 Fixed wall mount for SMART Board interactive flat panels

### Warranty

Three-year limited equipment warranty

### Extended warranty

EWY1-SPNL-6265 One-year warranty extension

EWY2-SPNL-6265 Two-year warranty extension

# INTEGRATE AV

Audio Visual Design, Integration & Implementation

**1800 742 748**

**INTEGRATE AV**

Suites 406 – 407  
384 Eastern Valley Way  
Roseville, NSW 2069

t. 1800 742 748

e. [info@integrateav.com.au](mailto:info@integrateav.com.au)  
[www.integrateav.com.au](http://www.integrateav.com.au)

**SMART**  
Collaborate Naturally™

Preferred SMART  
Authorised Sales Center  
Gold Partner

© 2017 SMART Technologies ULC. All rights reserved. SMART Board, SMART kapp, DVIT, Pen ID, Object Awareness, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. iPhone, iPad, iPod touch and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play, Android and Chrome are trademarks of Google Inc. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: [www.smarttech.com/patents](http://www.smarttech.com/patents). Contents are subject to change without notice. 01/2017.